



Please read before attempting to install Magnetic Lock

MOUNTING INSTRUCTIONS

Mount the armature plate on the door/gate using the rubber washer. The rubber washer and steel washer are installed between the armature plate and door, using the sex-nut bolt.



Typical Installation


****IMPORTANT****: Do not install the armature plate too tightly, which ensures the washer remains flexible – in order for the armature plate to properly mate with the magnet.

Place against door

Armature



EXML1200-GATE Dimensions

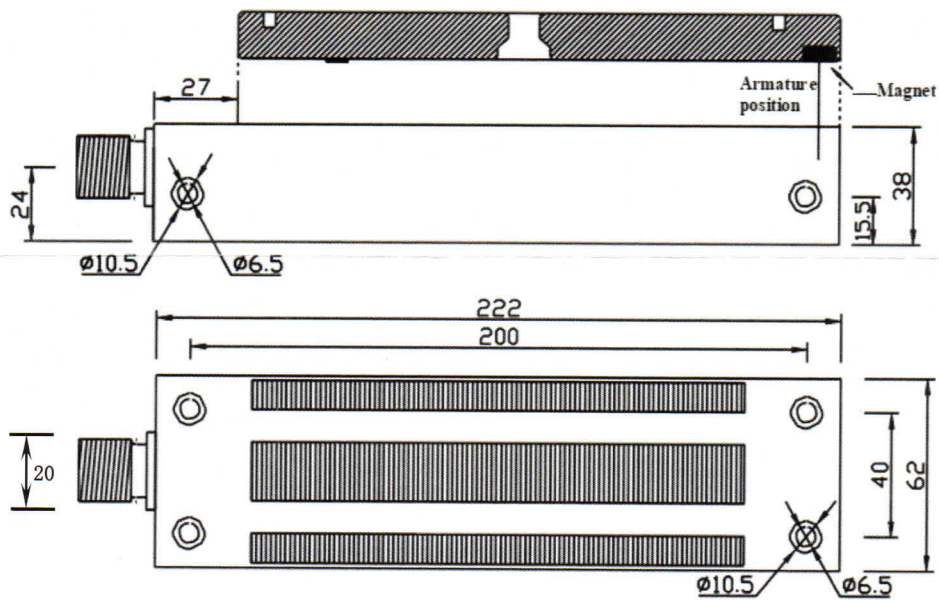

Bag Contents:

- 4 x Bolts
- 4 x Split Lock washer
- 4 x Locations Pins
- 1 x Rubber washer
- 1 x 25mm washer
- 2 x 20mm washer
- 1 x Sex Nut Bolt
- 1 x Barrel Nut
- 1 x Diode
- 1 x Allen Key

CE